

4K@60Hz Input Module



Key Features

- Support HDMI 1.4, HDMI 2.0, DP1.2 and DUAL DVI inputs up to 3840x2160@60Hz
- EDID Management
- HDCP 2.x compatible for HDMI 2.0 input
- Image Quality Adjustment for Brightness and Contrast
- Pixel based and picture in picture


Specification

Inputs	1 × Dual DVI	
	1 × HDMI 1.4 (with loop)	
	1 × HDMI 2.0	
	1 × DP 1.2	
Connectors	Standard DVI-I socket	
	Standard HDMI-A socket	
	Display Port	
Input Resolution	VESA:	3840x2160@24 3840x2160@25 3840x2160@30 3840x2160@50 3840x2160@60
	SMPTE:	525/29.97/59.94 NTSC 625/25/50 PAL 720p50/59.94/60 1080i50/59.94/60 1080P23.94/24/25/30/50/59.94/60 2160P23.94/24/25/30/50/59.94/60
Supported Standards	HDMI:	1.4 2.0
	DVI:	Dual Link
	DP:	1.2
Signal Level	TMDS pwl, Max 300Mhz bandwidth	
Supported Bandwidth	Max DP link speed up to 5.4 GHz for DP1.2	
	Max HDMI speed up to 3 GHz	
	Support Dual DVI input up to 300 MHz	

Order Codes

Product Code	Item
190-0003-15-0	4K@60Hz Input Module

Dimensions

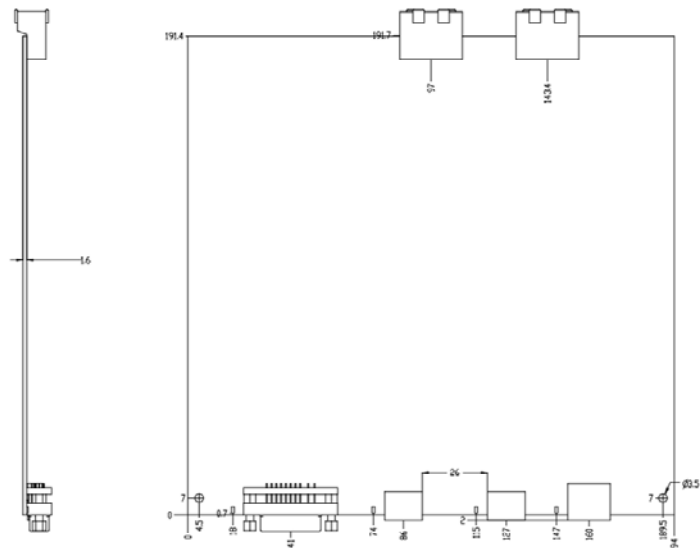

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgbink.com <http://www.rgbink.com>
 Headquarter: S601-607, S504 Weiye Building Torch Hi-Tech Industrial Development Zone,
 Xiamen, Fujian Province, P.R.C

Specifications are correct at time of printing and subject to change or alteration without notice.

