

MSP 325L HDMI 2.0 to H.265 Encoder



Key Features

- Support 4K@60Hz, HDR 10bit
- Support OSD
 - ⊙ support Text, Image, Rolling Text
 - ⊙ support import up to 4 logos as option
- Support recording AV to media storage via USB 3.0 or SD
 - ⊙ built in SAMBA server
 - ⊙ check and browse on Network Place
- Manage configuration on Web
- Search and browse vedieo on ONVIF


Specification

Connectors	Input	HDMI	2×HDMI-A (1 In /1 Loop)
	Output	H.265	1×RJ45
	Audio	IN/Out	2×3.5mm Jack
	Record	USB 3.0	1×USB-A
		SD	1×SD slot
Power		1×DC Jack	
Performance	Input Resolutions	HDMI SMPTE VESA	720p@23.98/24/25/29.97/30/50/59.94/60 1080i@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@60 800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60 2048×1152@60 2560×1440@60 3840×1080@60 3840×2160@60 4096×2160@60
	Output Resolutions	H.264 H.265	176×144 240×180 320×180 320×240 320×256 352×228 352×480 400×224 400×320 480×270 480×272 480×320 480×360 480×384 480×480 544×480 608×448 640×360 640×480 704×576 720×404 720×480 720×540 720×576 850×480 1024×576 1280×720 1680×1056 1920×1080 2048×1152 2560×1440 3840×1080 3840×2160 4096×2160
	Audio	Sampling Rate Encoding Bit Rate	44100 48000 AAC/AAC+/AAC++/MP3/MP2/AC3 MP2: 64000-320000 / AC3:40000-640000
	Record	Media Format	TS
	Supported Standard	HDMI H.265	2.0 PROFILE_BASELINE/PROFILE_MAIN/ PROFILE_EXTENDED/PROFILE_HIGH
Power	Input Voltage	DC 12V/2A	
	Constant Power	<5W	
Enviroment	Working Temperature	-20 ~60℃	
	Humidity	20 - 90%	
Physical	Weight	Net (Device)	0.4kg
	Dimensions	Net (Device)	156mm×104mm×35mm

Order Codes

Product Code	Item
601-1325-01-0	MSP 325L

Application

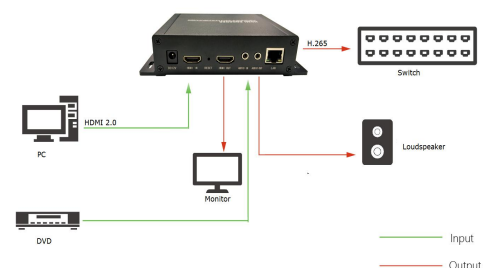

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink®

www.rgbink.com

