


MSP 405premier



Key Features

- Install up to 2 units to a 1 unit size rack for installation and with redundant power supply capacity
- Convert SDI signal (HD/3G/6G/12G-SDI) to HDMI 2.0 signal; support auto format adaptation
- Convert SDI signal (HD/3G/6G/12G-SDI) to fiber signal; support signal relay for long-distance transmission
- Convert HDMI 2.0 signal to SDI signal (HD/3G/6G/12G-SDI); support auto format adaptation
- Convert HDMI 2.0 signal to fiber; support medium to long-distance transmission and auto format adaptation
- Convert fiber signal to SDI signal (HD/3G/6G/12G-SDI); support medium to long-distance transmission and auto format
- Convert fiber signal to HDMI 2.0 signal; support medium to long-distance transmission and auto format adaptation
- Single-mode and multi-mode fiber module optional
- Standard Test Pattern generator built in for on-site setup
- Audio playback and embedding function
- Upgrade and control via Ethernet interface for system integration and custom development
- Back panel in lockable connection for premier quality

Application

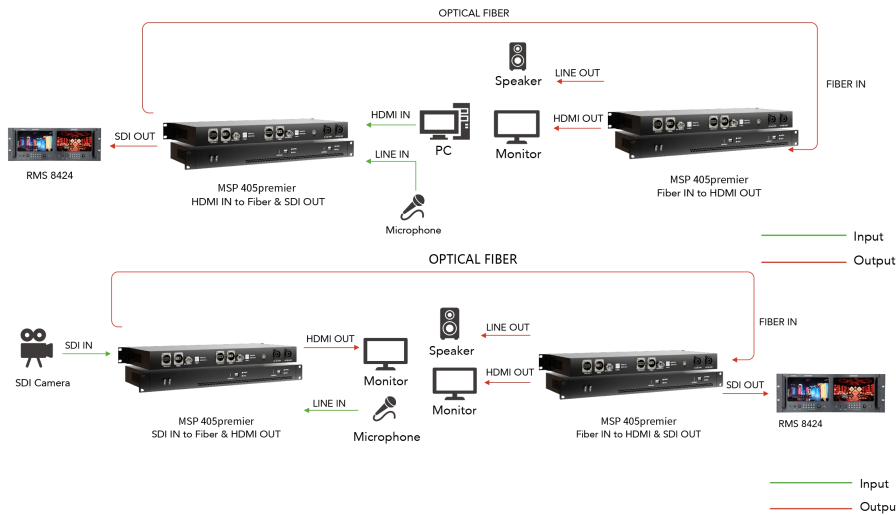

Specification

Interface	Input	HDMI	2×HDMI-A
		SDI	2×BNC
		Fiber	2×LC
	Output	HDMI	2×HDMI-A
SDI		2×BNC	
Fiber		2×LC	
Audio	Line In	2×3.5mm Audio Socket	
	Line Out	2×3.5mm Audio Socket	
Control	LAN	2×RJ45	
	Reset	2×IP Reset Button	
	Switch	2×Dial Switch	
Performance	Resolution	HDMI/SDI/Fiber	720p@50/59.94/60 1080i@50/59.94/60 1080p@25/29.97/30/50/59.94/60 2160p@25/29.97/30/50/59.94/60
	Supported Standards	HDMI	2.0b
		SDI/Fiber	HD/3G/6G/12G-SDI
Power	Input Voltage		1×Built-in Fan
			AC 85~264V, 50/60Hz

Order Codes

Order Code	Item
601-0405-02-0	MSP 405premier

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgbink.com

