

MSP326 H.265 Decoder



Key Features

- Support output 4K@30Hz, YUV 4:4:4, HDCP 2.X
- Support HDMI, VGA, CVBS output
- Support external audio output
- Manage configuration on Web
- Support standard protocol: RTSP/HTTP TS/HTTP FLV/RTMP/UDP
Private protocol: HTTP PTE


Specification

Connectors	Input	H.265	1×RJ45
	Output	HDMI	1×HDMI-A
		VGA	1×DB15
		CVBS	1×BNC
Audio		1×3.5mm Jack	
Power			1×DC Jack
Performance	Input Resolutions	H.264 H.265 176×144 240×180 320×180 320×240 320×256 352×228 352×480 400×224 400×320 480×270 480×272 480×320 480×360 480×384 480×480 544×480 608×448 640×360 640×480 704×576 720×404 720×480 720×540 720×576 850×480 1024×576 1280×720 1680×1056 1920×1080 2048×1152 2560×1600 3840×1080 3840×2160@30	
	Output Resolutions	HDMI SMPTE 480p 576p 720p@50/60 1080i@50/60 1080p@25/30/50/60 1440p@30 2160p@30 VESA 800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60 2048×1152@60 2560×1440@30 3840×2160@30 CVBS 480i 576i	
	Supported Standard	HDMI	1.4
		H.265	baseline profile/main profile/high profile
Power	Input Voltage	DC 12 1.5A	
Environment	Working Temperature	-20 ~60°C	
	Humidity	20 - 90%	
Physical	Weight	Net (Device)	0.5kg
	Dimensions	Net (Device)	130mm×122mm×26mm

Application



Dimension

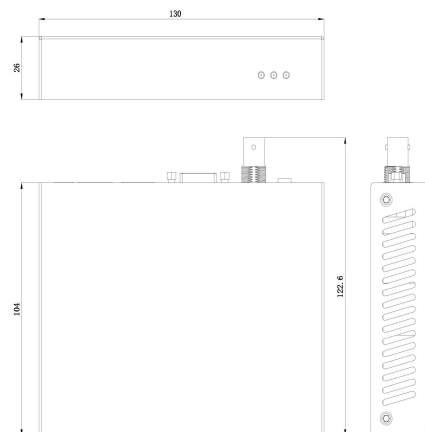

Order Codes

Product Code	Item
601-0326-01-0	MSP326

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]

www.rgblink.com

