


# VSP 168 HD




## Key Features

- Support for resolutions up to 2048x1152 (2560x816)
- Seamless switching between inputs
- Multiple cascade for sync mapping
- 5 inputs including 3G-SDI
- DVI, 3G-SDI, HBaseT & FiberPort outputs
- Picture in picture
- Remote control by RS 232
- Compact 1U ½ width format with 1U & 2U rack housing options available

## Application

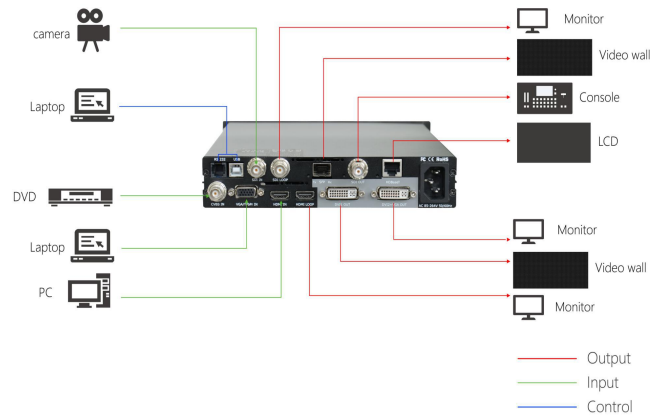

## Dimensions

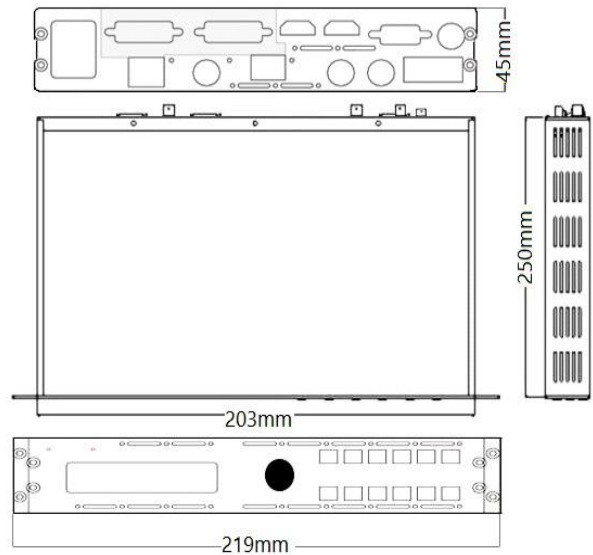

## Order Codes

Product Code	Item
100-0168-03-0	VSP168 HD
900-1001-01-0	168RU1 -rack mount

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com  
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.



www.rgblink.com



## Specification

<b>Connectors</b>	Input	CVBS SDI In/Loop HDMI In/Loop VGA/YPbPr	1xBNC 2xBNC 2xHDMI (DVI Compatible) 1xDB15
	Output	DVI Optical Fiber SDI HDBaseT	2 x DVI (DVI 1   DVI 2 -VGA compatible) 1x SFP 1 x BNC 1 x RJ45
	Communication	RS232 USB	1 x RJ11 1 x USB-B
	Power		1 x IEC
<b>Performance</b>	Input Resolutions	CVBS SMPTE SDI SMPTE HDMI SMPTE VESA VGA VESA	480i   576i 480i   576i   720p@50/60   1080i@59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60   1080psf@23.98/24/25/29.97/30 /50/59.94/60 480i   576i   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60 800x600@60   1024x768@60   1280x768@60   1280x1024@60   1366@768@60   1600x1200@60   1920x1080@60 640x480@60   800x600@60   1024x768@60   1280x720@60   1280x800@60   1280x960@60   1280x1024@60   1366x768@60   1440x900@60   1400x1050@60   1600x1200@60   1680x1050@60   1920x1080@60
	Output Resolutions	<i>Select from below or configure customized</i> SDI SMPTE Optical Fiber SMPTE VESA HDBaseT SMPTE VESA DVI   VGA VESA	720p@50/59.94/60   1080p@50/59.94/60 720p@50/59.94/60   1080p@50/59.94/60 800x600@60   1024x768@60/75/85   1280x720@50/59.94/60   1280x800@60   1280x960@60   1280x1024@60/75/85   1400x1050@60   1600x1200@60   1920x1080@50/60   2048x1152@60   2560x816@60 720p@50/59.94/60   1080p@50/59.94/60 800x600@60   1024x768@60/75/85   1280x720@50/59.94/60   1280x800@60   1280x960@60   1280x1024@60/75/85   1400x1050@60   1600x1200@60   1920x1080@50/60 800x600@60   1024x768@60   1280x768@60   1280x1024@60   1600x1200@60   1920x1080@50/60   2048x1152@60   2560x816@60 <i>Not all resolutions supported on VGA</i>
	Supported Standard	HDMI SDI DVI VGA	1.3 SMPTE 425M (Level A)   SMPTE 424M   SMPTE 292M   SMPTE 259M-C   DVB-ASI Single DVI UXGA
<b>Features</b>	Signal Backup	Support	
	OSD	Support	
	EDID	Support	
	Effects	Cut,Fade	
<b>Power</b>	Input Voltage	AC 85~264V 50/60Hz	
	Max Power	65W	
<b>Enviroment</b>	Temperature	0°C ~ 40°C	
	Hudmidity	10%~85%	
<b>Physical</b>	Weight	Nett	1.3kg
		Packaged	3.8kg
	Dimension	Nett	219mm*250mm*45mm
		Packaged	540mm*370mm*165mm

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

**RGBlink**<sup>®</sup>



Specifications are correct at time of printing and subject to change or alteration without notice.

www.rgblink.com