

# SDI Input Module



## Key Features

- Up to 4 independent SDI inputs and loop out
- Support SD-SDI, HD-SDI, 3G-SDI
- Support SDI embedded audio
- Support max resolution 1920×1080@60
- Hot swappable into X3 devices


## Specification

<b>Inputs</b>	4 × SDI (with loop)
<b>Connectors</b>	BNC
<b>Input Resolution</b>	SMPTE 425M (3G Level A) 4:2:2: 1920×1080/60 (1:1)   1920×1080/50 (1:1). SMPTE 274M (HD): 1920×1080/60 (2:1) or 1920×1080/30 (PsF)   1920×1080/50 (2:1) or 1920×1080/30 (1:1)   1920×1080/25 (1:1)   1920×1080/24 (1:1)   1920×1080/24 (PsF) SMPTE 125M (SD): 1440×487/60 (2:1) SMPTE ITU-R BT.656 (SD)   1440×576/50 (2:1) Or dual link progressive, 625-line generic.
<b>Supported Standards</b>	SMPTE 425M – 3G Level A
<b>Data Rate</b>	2.97Gb/s, 2.97/1.001Gb/s, 1.485Gb/s, 1.485/1.001Gb/s and 270Mb/s
<b>Balance</b>	Belden 1694A cable: 100m at 2.97Gb/s 200m at 1.485Gb/s 400m at 270Mb/s

## Order Codes

Product Code	Item
190-0003-04-0	Quad SDI Input Module

## Dimensions

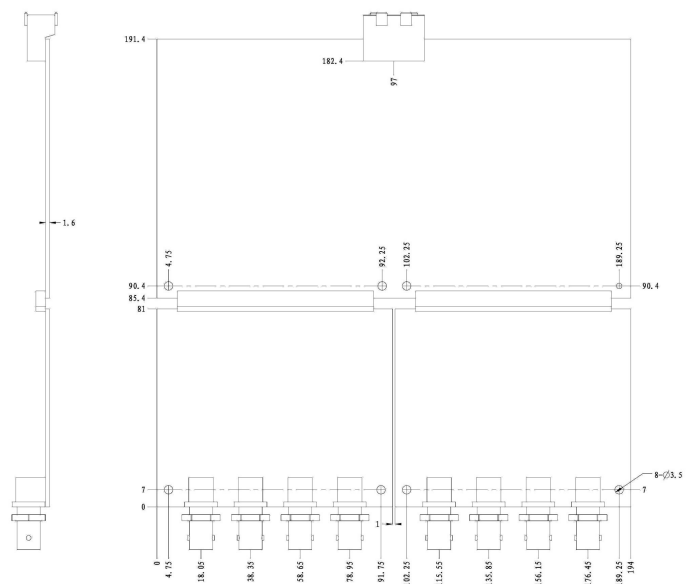

Tel: +86-592-5771197 Fax: +86-592-5788216  
 E-mail: sales@rgbink.com http://www.rgbink.com  
 Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial  
 Development Zone, Xiamen, Fujian Province, P.R.C



*Specifications are correct at time of printing and subject to change or alteration without notice.*