

D-SDI Input Module



Specification

Inputs	4 x 3G SDI	
	4 x 3G SDI LOOP	
Connectors	BNC	
Input Resolution	SMPTE:	480i 576i 720p@50/60 1080i@59.94/60
		1080p@23.98/24/25/29.97/30/59/59.94/60 1080psf@23.98/24/25/29.97/30
Supported Standards	3G SDI	
Supported Bandwidth	Maximum SDI speed is up to 2.97GHz	


Order

Product Code	Item
190-0003-04-0	Quad D- SDI Input Module

Key Features

- EDID Management
- Pixel based
- Deinterlace
- Image Quality Adjustment for Transparency, Sharpness, Saturation, Tone, Color Temperature and Contrast
- The Input can be rotated

Dimensions

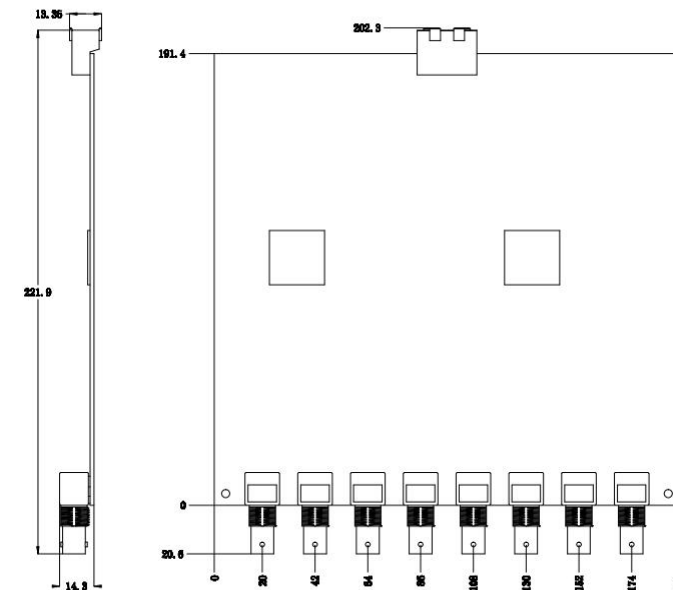

RGBlink[®]

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgbink.com <http://www.rgbink.com>
 Headquarter: S601-607, S504 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C
*Specifications are correct at time of printing and subject to change
 or alteration without notice.*