


H.264 Input Module

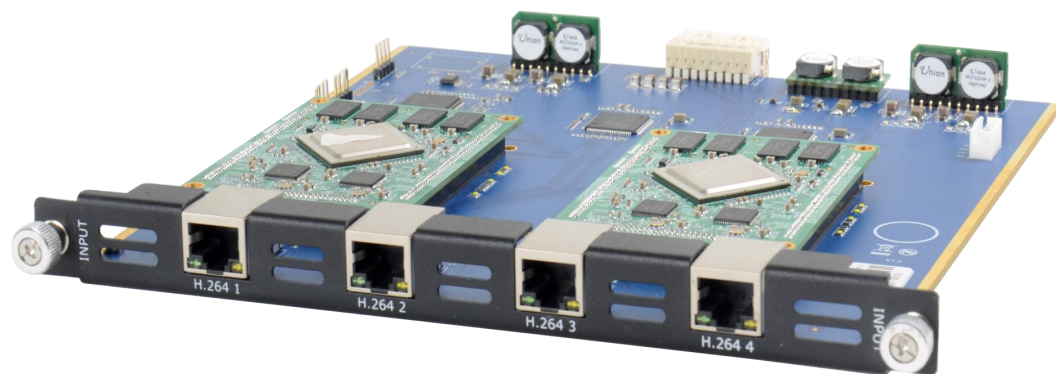

Specification

| | |
|---------------------|---|
| Inputs | 4 x H.264 |
| Connectors | RJ45 |
| Input Resolution | 176x144@60 240x180@60 320x180@60 320x240@60 320x256@60 352x228@60 352x480@60 400x224@60 |
| | 400x320@60 480x270@60 480x272@60 480x320@60 480x360@60 480x384@60 480x480@60 544x480@60 |
| | 608x448@60 640x360@60 640x480@60 704x576@60 720x404@60 720x480@60 720x540@60 720x576@60 |
| | 850x480@60 1024x576@60 1280x720@60 1680x1056@60 1920x1080@60 |
| Supported Standards | H.264/MPEG-4 AVC |
| Decoding Protocols | H.264 baseline/main/high profile L5.0\MPEG4 SP L0-3\ASP L0-5\MJPEG/JPEG baseline |


Order Codes

| Product Code | Item |
|---------------|-------------------------|
| 190-0003-13-0 | Quad H.264 Input Module |

Key Features

- Up to 4 independent H.264 Video Streaming Inputs
- Supports All standard H.264 Signals
- Supports Videos up to 60fps
- Configure from XPOSE

Dimensions

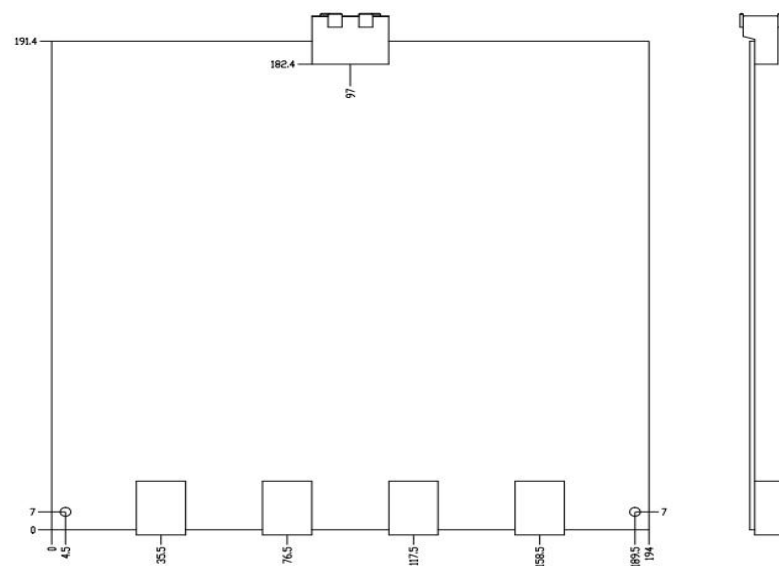

RGBlink[®]

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgblink.com http://www.rgblink.com
 Headquarter: S601-608 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C.
**Specifications are correct at time of printing and subject to
 change or alteration without notice.**