

H.264 Output Module



Specification

Outputs	4 x H.264
	2 x HDMI
Connectors	RJ45
	HDMI-A
Output Resolution	H.264: 176x144@60 240x180@60 320x180@60 320x240@60 320x256@60 352x228@60 352x480@60 400x224@60 400x320@60 480x270@60 480x272@60 480x320@60 480x360@60 480x384@60 480x480@60 544x480@60 608x448@60 640x360@60 640x480@60 704x576@60 720x404@60 720x480@60 720x540@60 720x576@60 850x480@60 1024x576@60 1280x720@60 1680x1056@60 1920x1080@60
	HDMI: SMPTE: 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@25/29.97/30/50/59.94/60 VESA:1024x768@60/75/85 1280x800@60 1280x1024@60/75/85 1360x768@x60 1366x768@60 1024x768@60/75/85 1280x800@60 1280x1024@60/75/85 1360x768@60 1366x768@60
Supported Standards	H.264: H.264/MPEG-4 AVC HDMI: 1.3
Signal Level	TMDS pwl, single pixel input,165MHz bandwidth
Encoding Protocols	H.264 baseline/main/high profile L4.2 MJPEG/JPEG baseline


Order Codes

Product Code	Item
190-0003-27-0	Quad H.264 Output Module

Key Features

- 2 independent H.264 Output Ports and 2 H.264 Backup Ports
- 2 HDMI 2K Local Preview Output
- Direct Preview of any available Input Source
- Preview multiple Signals in T1
- Configure additional Preview Stream via T1

Dimensions

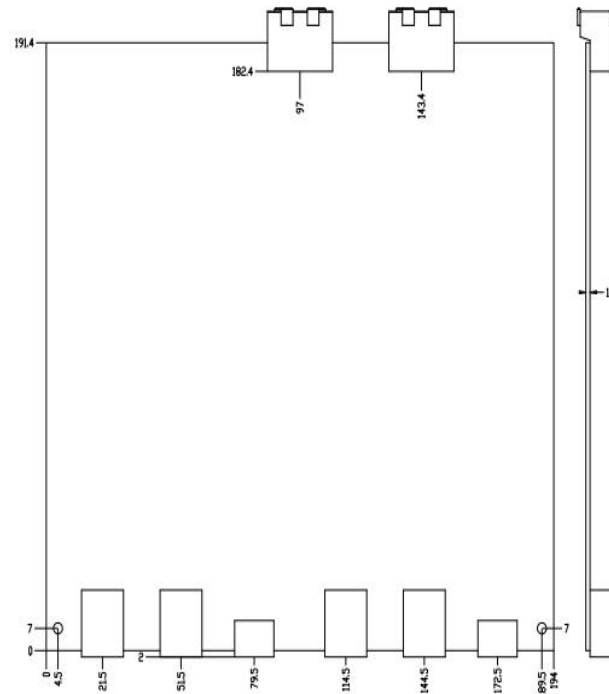

RGBlink®

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgbink.com <http://www.rgbink.com>
 Headquarter: S601-608 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C.
**Specifications are correct at time of printing and subject to
 change or alteration without notice.**