


X3e






Key Features

- Support for HDR
- Video wall controller for multiple inputs
- Modular Design throughout
- Hot swap input and output modules
- Multiple operation modes
- Support for 3D signals
- Control via XPOSE and T series consoles
- Redundant hot swap PSU option

Application

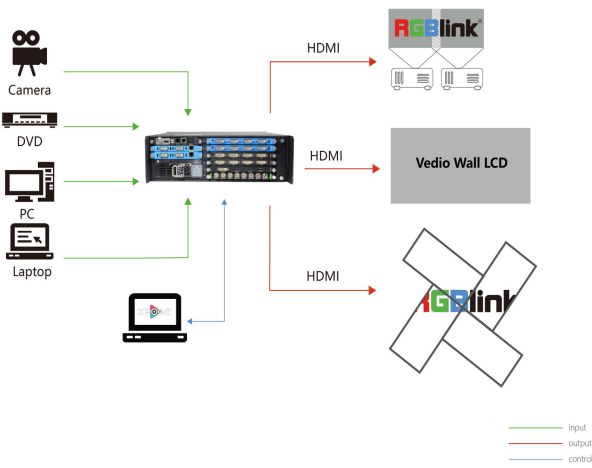

Dimensions

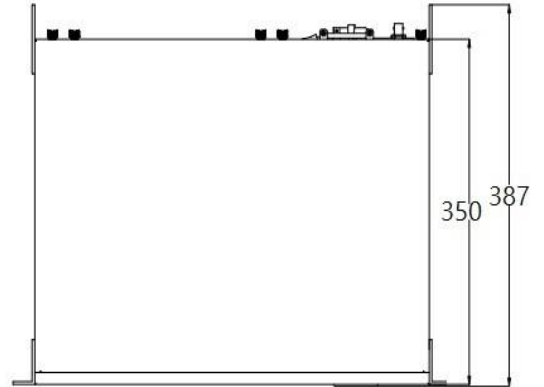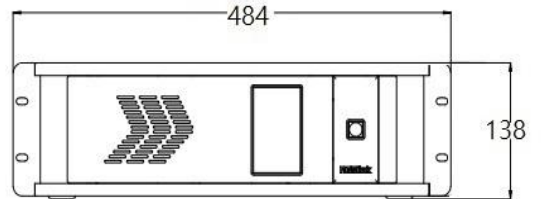

Order Codes

Product Code	Item
310-0003-16-0	X3e
190-0003-01-0	Quad DVI Input Module
190-0003-02-0	Quad HDMI Input Module
190-0003-03-0	Quad VGA Input Module
190-0003-04-0	Quad 3G SDI Input Module
190-0003-06-0	Octuple CVBS Input Module
190-0003-07-0	Quad USB Input Module
190-0003-11-0	4K@30 Digital Input Module
190-0003-13-0	Quad H.264 Input Module
190-0003-18-0	Quad HDBaseT Input Module

Product Code	Item
190-0003-21-0	Quad DVI Output Module
190-0003-22-0	Quad 2K HDMI Output Module
190-0003-28-0	ARO Rotation Module
950-0001-00-0	Power Supply 200W

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.



www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.

Specification

Connectors	Input	<p>4 slots, up to 16 inputs</p> <p>Select from</p> <table> <tr> <td>4K@30 Module</td> <td>2 x DVI-I 2x HDMI-A (1 In/1 Loop) 2x DisplayPort (1 In/1Loop)</td> </tr> <tr> <td>3G SDI Module</td> <td>8 x BNC (4 In 4 Loop)</td> </tr> <tr> <td>HDMI Module</td> <td>4 x HDMI-A</td> </tr> <tr> <td>DVI Module</td> <td>4 x DVI-I</td> </tr> <tr> <td>H.264 Module</td> <td>4 x RJ 45</td> </tr> <tr> <td>HDBaseT Module</td> <td>4 x RJ 45</td> </tr> <tr> <td>VGA Module</td> <td>4 x DB15</td> </tr> <tr> <td>CVBS Module</td> <td>8 x BNC</td> </tr> <tr> <td>USB Module</td> <td>4 x USB-A</td> </tr> </table>	4K@30 Module	2 x DVI-I 2x HDMI-A (1 In/1 Loop) 2x DisplayPort (1 In/1Loop)	3G SDI Module	8 x BNC (4 In 4 Loop)	HDMI Module	4 x HDMI-A	DVI Module	4 x DVI-I	H.264 Module	4 x RJ 45	HDBaseT Module	4 x RJ 45	VGA Module	4 x DB15	CVBS Module	8 x BNC	USB Module	4 x USB-A
	4K@30 Module	2 x DVI-I 2x HDMI-A (1 In/1 Loop) 2x DisplayPort (1 In/1Loop)																		
	3G SDI Module	8 x BNC (4 In 4 Loop)																		
	HDMI Module	4 x HDMI-A																		
DVI Module	4 x DVI-I																			
H.264 Module	4 x RJ 45																			
HDBaseT Module	4 x RJ 45																			
VGA Module	4 x DB15																			
CVBS Module	8 x BNC																			
USB Module	4 x USB-A																			
Output	<p>2slots, up to 8 outputs</p> <p>Select from</p> <table> <tr> <td>HDMI Module</td> <td>4 x HDMI-A</td> </tr> <tr> <td>DVI Module</td> <td>4 x DVI-I</td> </tr> <tr> <td>ARO Rotation Module</td> <td>4 x DVI-I</td> </tr> </table>	HDMI Module	4 x HDMI-A	DVI Module	4 x DVI-I	ARO Rotation Module	4 x DVI-I													
HDMI Module	4 x HDMI-A																			
DVI Module	4 x DVI-I																			
ARO Rotation Module	4 x DVI-I																			
Communication	<table> <tr> <td>LAN</td> <td>1 x RJ 45</td> </tr> <tr> <td>RS 232</td> <td>1 x RJ 11</td> </tr> <tr> <td>1 x USB</td> <td>1 x USB-B</td> </tr> <tr> <td>Genlock/Sync</td> <td>1 x BNC 1 x HDMI-A</td> </tr> </table>	LAN	1 x RJ 45	RS 232	1 x RJ 11	1 x USB	1 x USB-B	Genlock/Sync	1 x BNC 1 x HDMI-A											
LAN	1 x RJ 45																			
RS 232	1 x RJ 11																			
1 x USB	1 x USB-B																			
Genlock/Sync	1 x BNC 1 x HDMI-A																			
Power	<table> <tr> <td>2 slots</td> <td>Up to 2 power Inputs</td> <td>1 x IEC (Each PSU)</td> </tr> </table>	2 slots	Up to 2 power Inputs	1 x IEC (Each PSU)																
2 slots	Up to 2 power Inputs	1 x IEC (Each PSU)																		
Performance	Input Resolutions	<p>SDI</p> <p>SMPTE 480i 576i 720p@23.98/24/25/29.97/30/50/59.94/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30</p> <p>DVI HDMI</p> <p>SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@239.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30</p> <p>VESA 800x600@60 1024x768@60 1280x768@60 1280x960@60 1280x1024@60 1360x768@60 1440x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1080@60 2048x1152@60 2560x960@60</p> <p>HDBaseT</p> <p>SMPTE 720p@50/60 1080p@24/25/30/50/60</p> <p>VESA 800x600@60/75/85 1024x768@60/75/85 1280x768@60 1280x800@60 1280x1024@60/75/85 1360x768@60 1366x768@60 1400x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2048x816@60</p> <p>CVBS</p> <p>SMPTE 480i 576i</p> <p>VGA</p> <p>VESA 800x600@60 1024x768@60 1280x960@60 1280x1024@60 1360x768@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60</p> <p>H.264</p> <p>176x144 240x180 320x180 320x240 320x256 352x228 352x480 400x224 400x320 480x270 480x272 480x320 480x360 480x480 544x480 608x448 640 x 360 640x480 704x576 720x404 720x480 720x540 1280x720 720x576 850x480 1024x576 1680x1056 1920x1080</p> <p>4K@30</p> <p>SMPTE 480p 576p 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30</p> <p>VESA 800x600@60 1024x768@60 1280x800@60 1280x1024@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1080@60 2048x1152@60 2560x1600@60 3840 x 2160@30</p>																		
	Output Resolutions	<p>Select from below or configure customized</p> <p>DVI HDMI</p> <p>SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60</p> <p>VESA 800x600@60 1024x768@60 1280x800@60 1280x960@60 1280x1024@60 1360x768@60 1440x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1152@60</p>																		
	Supported Standard	<table> <tr> <td>SDI</td> <td>SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI</td> </tr> <tr> <td>HDMI</td> <td>1.4</td> </tr> <tr> <td>DP</td> <td>1.1</td> </tr> <tr> <td>DVI</td> <td>Dual Link</td> </tr> <tr> <td>HDBaseT</td> <td>1.0</td> </tr> </table>	SDI	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI	HDMI	1.4	DP	1.1	DVI	Dual Link	HDBaseT	1.0								
	SDI	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI																		
	HDMI	1.4																		
	DP	1.1																		
	DVI	Dual Link																		
	HDBaseT	1.0																		
	Grey Level	12 bit																		
	Color Space	4:4:4																		
Power	Input Voltage	AC 100V-240V, 50/60Hz																		
	Max Power	205W																		
Enviroment	Temperature	0°C~55°C																		
	Hudmidity	10%~90%																		
Physical	Weight	Net 12.3kg Package 20.4kg																		
	Dimension	Net 485mmx387mmx135mm Package 635mmx545mmx275mm																		

