


X3p






Key Features

- Support for HDR
- Modular Design throughout for input and output
- Hot swap input and output modules
- 4K@60 inputs compatible including HDMI 2.0, DisplayPort1.2
- Up to 12G-SDI Input option
- Support for H.264 streaming input
- Standard with Dual Preview Streaming Module
- Preview 16 inputs
- 4K/2K EDID Management
- Multiple operation modes
- Support for 3D signal
- Control via XPOSE and T series consoles
- Redundant hot swap PSU option

Application

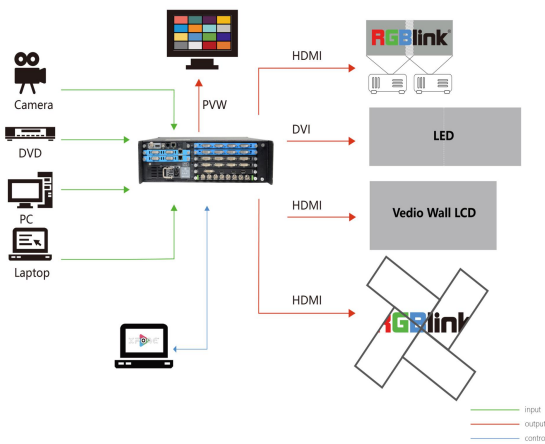

Dimensions

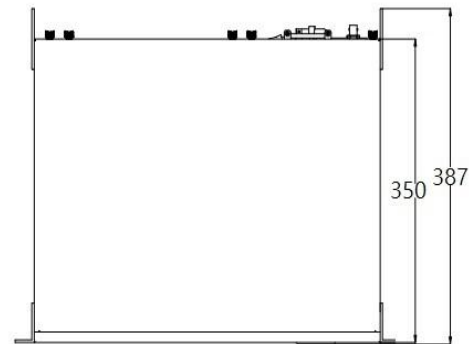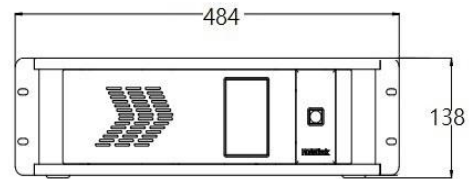

Order Codes

Product Code	Item
310-1003-11-0	X3p (Standard with PVW)
190-0003-01-0	Quad DVI Input Module
190-0003-02-0	Quad HDMI Input Module
190-0003-03-0	Quad VGA Input Module
190-0003-04-0	Quad 3G SDI Input Module
190-0003-06-0	Octuple CVBS Input Module
190-0003-07-0	Quad USB Input Module
190-0003-11-0	4K@30 Digital Input Module
190-0003-15-0	4K@60 Digital Input Module
190-0003-13-0	Quad H.264 Input Module
190-0003-17-0	12G SDI Input Module
190-0003-18-0	Quad HDBaseT Input Module

Product Code	Item
190-0003-21-0	Quad DVI Output Module
190-0003-22-0	Quad 2K HDMI Output Module
190-0003-24-0	Quad 3G SDI Output Module
190-0003-25-0	Quad HDBaseT Output Module
190-0003-28-0	ARO Rotation Module
190-0003-33-0	PVW Module
190-0003-38-0	4K HDMI Output Module
950-0005-00-0	Power Supply 400W

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

RGBlink[®]

www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.

Specification

Connectors	Input	4 slots, up to 16 inputs Select from	4K@60 Module 12G SDI Module 4K@30 Module 3G SDI Module 2K HDMI Module DVI Module H.264 Module HDBaseT Module VGA Module CVBS Module USB Module	1 x DVI-I 2 x HDMI-A 1 x DisplayPort 4 x BNC 2 x DVI-I 2x HDMI-A (1 In/1 Loop) 2x DisplayPort (1 In/1Loop) 8 x BNC (4 In 4 Loop) 4 x HDMI-A 4 x DVI-I 4 x RJ 45 4 x RJ 45 4 x DB15 8 x BNC 4 x USB-A
	Output	2slots, up to 8 outputs Select from	3G SDI Module 2K HDMI Module DVI Module HDBaseT Module 4K HDMI Module Rotation Module	4 x BNC 4 x HDMI-A 4 x DVI-I 4 x RJ 45 2 x HDMI-A 4 x DVI-I
	PVW	2 slots , standard with	2 x PVW Module	2 x DVI I 1 x RJ 45 (Each Module)
	Communication		LAN RS 232 USB Genlock/Syn	1 x RJ 45 1 x RJ 11 1 x USB-B 1x BNC 1 x HDMI-A
	Power	2 slots	Up to 2 power Inputs	IEC
Performance	Input Resolutions	3G SDI SMPTE	480i 576i 720p@23.98/24/25/29.97/30/50/59.94/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30	
	DVI HDMI	SMPTE	720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30	
	VESA		800x600@60 1024x768@60 1280x768@60 1280x960@60 1280x1024@60 1360x768@60 1440x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1080@60 2048x1152@60 2560x960@60	
	HDBaseT	SMPTE	720p@50/60 1080p@24/25/30/50/60	
	VESA		800x600@60/75/85 1024x768@60/75/85 1280x768@60 1280x800@60 1280x1024@60/75/85 1360x768@60 1366x768@60 1400x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2048x816@60	
	CVBS	SMPTE	480i 576i	
	VGA		800x600@60 1024x768@60 1280x960@60 1280x1024@60 1360x768@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60	
	H.264		176x144 240x180 320x180 320x240 320x256 352x228 352x480 400x224 400x320 480x270 480x272 480x320 480x360 480x480 544x480 608x448 640 x 360 640x480 704x576 720x404 720x480 720x540 720x576 850x480 1024x576 1280x720 1680x1056 1920x1080	
	4K@30	SMPTE	480p 576p 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30	
	VESA		800x600@60 1024x768@60 1280x800@60 1280x1024@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1080@60 2048x1152@60 2560x1600@60 3840 x 2160@30	
4K@60	SMPTE	720p@23.98/24/25/29.97/30/50/59.94/60 1080p@50/59.94/60 2160p@30/60		
VESA		800x600@60 1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x900@60 1600x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1080@60 2048x1152@60 2560x812@60 2560x960@60 2560x1600@60 3840x1080@60 3840x2160@30 3840x2160@60		
12G SDI	SMPTE	720p@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@23.98/24/25/29.97/30/50/59.94/60		
Output Resolutions	Select from below or configure customized	SDI SMPTE	720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30	
DVI 2K HDMI	SMPTE	720p@50/59.94/60 1080p@50/59.94/60		
VESA		800x600@60 1024x768@60/75/85 1280x720@50/59.94/60 1280x800@60 1280x960@60 1280x1024@60/75/85 1400x1050@60 1600x1200@60 1920x1080@23.98/24/25/29.97/30/50/59.94/60 2048x1152@60		
HDBaseT	SMPTE	720p@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60		
PVW H.264		1024x768@60/75/85 1280x768@60 1280x800@60 1280x1024@60/75/85 1360x768@60 1366x768@60 1400x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 1920x1080@60 1920x1200@60 1920x1080@60 2560x812@60 2048x816@60		
4K HDMI	SMPTE	720p@25/30/50/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@23.98/24/25/29.97/30/50/60		
VESA		800x600@60 1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x900@60 1600x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60 2560x1600@60 3840x1080@60 3840x2160@60 4096x2160@60		
Supported Standard	SDI	SMPTE ST 2082-1, SMPTE ST 2081-1, SMPTE ST 424, SMPTE ST 292-1, SMPTE ST 259, DVB-ASI, MADI		
HDMI		2.0		
DP		1.2		
DVI		Dual Link		
HDBaseT		1.0		
Grey Level		12 bit		
Color Space		4:4:4		
Power	Input Voltage	AC 100V-240V, 50/60Hz		
	Max Power	205W		
Enviroment	Temperature	0°C ~ 55°C		
	Hudmidity	10%~90%		
Physical	Weight	Net 12.3kg Packaged 20.4kg		
	Dimension	Net 485mmx387mmx135mm Packaged 635mmx545mmx275mm		

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: S601 Weiyue Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.



www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.