

# MSP 231S

## SDI Capture Card




### Key Features

- Transform SDI input signal to USB output signal
- UVC/UAC standard
- Capture resolution up to 1920x1080
- MIC synchronous audio input
- Plug & Play – no drivers required
- Compatible with OBS, POTPLAYER, AMCAP, VLC software

### Specification

<b>Interface</b>	Input	SDI	2×BNC (1 IN   1 LOOP)
	Output	USB 2.0	1×USB-B
	Audio	MIC IN	1×3.5mm Audio Jack
<b>Performance</b>	Input Resolution	SDI	720P23.98/24/25/30   1080P23.98/24/25/30/50/59.94/60
	Output Resolution	USB 2.0	1920x1080   1600x1200   1360x768   1280x1024   1280x960   1280x720   1024x768   800x600   720x480   720x576   640x480
	Frame Rate	5-60 frames adjustable	
	AV Capture	Standard UVC/UAC	
	Driver	Plug & Play – no drivers required	
	Operation System	Windows/Linux /Android	
	Capture Software	OBS/Potplayer (Windows)	
	Sampling	YUV 4:2:2	
	Color Space	8bit	
	Supported Standards	SDI	Dual link, Level A
	USB	2.0	
<b>Power</b>	Power Consumption	<3W	
<b>Working Environment</b>	Temperature	-20℃~60℃	
	Humidity	5%~90%	
<b>Physical</b>	Weight	0.1kg	
	Dimension	87mm (10mm BNC interface included) x 51mm x 21mm	

### Application

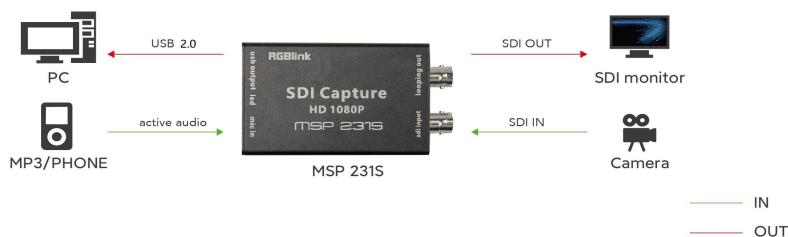

### Order Codes

Product Code	Item
601-0231-01-0	MSP 231S

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Bانشang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

**RGBlink**  
www.rgblink.com

