



ASK nano 4K




Key Features

- 1 transmitter & 2 receivers support dual display
- Compact and discrete
- Plug-and-Play – no drivers required
- Support for Windows, macOS, iOS and Android
- 100ms low latency
- Support HDMI output with embedded audio
- Built-in WIFI 5G Band 1 (preferred) and Band 4

Application Diagram

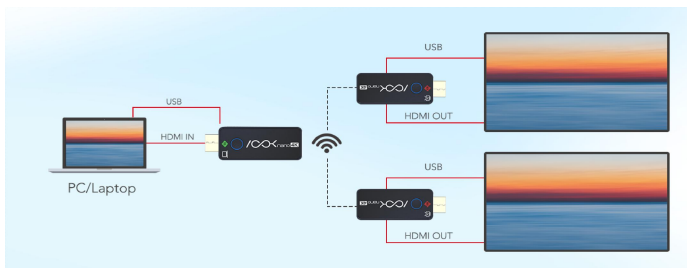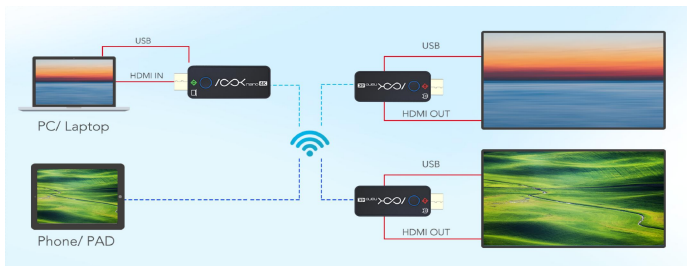

Dimensions

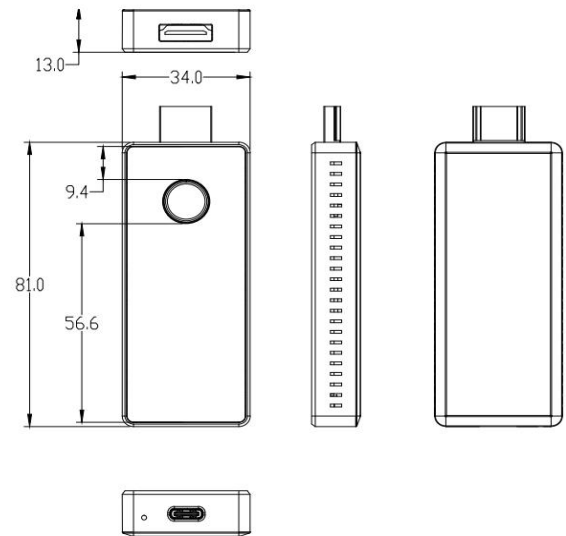

Order Codes

Product Code	Item
450-2002-02-0	ASK nano 4K Set (TX*1+RX*2)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.



www.rgbink.com

Specification

Receiver

Connectors	Output	HDMI	1×HDMI-A
	Power	USB	1×USB-C
Performance	Output Resolutions	HDMI	
		VESA	Up to 3840×2160@60
	Supported Standards	HDMI	2.0
		HDCP	2.2
Power	Input Voltage	DC 5V/1A	
	Max Power	3.5W	
Operating Environment	Temperature	0°C ~ 40°C	
	Humidity	10%~80% RH	
Storage Environment	Temperature	-10°C ~ 60°C	
	Humidity	5%~90% RH	
Physical	Weight	Net	0.03kg
	Dimension	Net	91mm×34mm×13mm

Transmitter

Connectors	Input	HDMI	1×HDMI-A
	Power	USB	1×USB-C
Performance	Input Resolutions	HDMI	
		SMPTE	1080p50/60
		VESA	3840x2160@24/25/30 1920×1080@24/25/30/50/60 1280x720@50/60
	Supported Standards	HDMI	1.4b
HDCP		1.4	
Power	Input Voltage	DC 5V/1A	
	Max Power	3.5W	
Operating Environment	Temperature	0°C ~ 40°C	
	Humidity	10%~80% RH	
Storage Environment	Temperature	-10°C ~ 60°C	
	Humidity	5%~90% RH	
Physical	Weight	Net	0.03kg
	Dimension	Net	91mm×34mm×13mm

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

