



D Series **Class 8K**
Image Processor



RGBlink[®]



First 8K Image Processor

8K 8K UHD Signal input, compatible with HDCP 2.X



Open API



HDMI 2.1 of DisplayPort 1.4

Built-in 4-inch LCD screen

EDID 8K EDID management

RGBlink D series presentation processors have long offered industry leading performance, image quality & technical excellence, having build a strong reputation across demanding broadcasting and presentation environments.

Introducing D8, the first 8K native video processor and the newest addition the D series range of performance processors.

Being 8K processor, D8 truly puts image quality first and continues to built on RGBlink visual processing excellence experience, embracing leading edge industry standards.

Connect 8K input sources up to UHD (7680x4320) with refresh rates at 30Hz offering full 4:4:4 color space and 60 Hz at 4:2:0 color space.

Custom resolutions and frame rates are configurable with D8 uniquely capable of dynamic reconfiguration. D8 also includes 8K EDID management.

Available in two variants, supporting the specific workflow of either an HDMI 2.1 or DisplayPort 1.4 video media source, both D8 models have quad HDMI 2.0 outputs that may be configured to deliver fully synced split video to downstream devices.

Outputs are independently fully configurable allowing a range of applications beyond split & stitch. Preset output configurations are built-in too for quick access to common layout arrangements.

The D8 front panel features a 4in touch screen which allows quick view of active port connections as well as real-time control of all features.


8K Sources & Management

Connect either HDMI 2.1 or Display 1.4 sources up to 8K 60Hz. Take advantage of 8K EDID management on board D8 for ease of connection to specific sources and characteristics.




8K Processing

D8 enables 8K video sources to be utilized in display applications, outputting full synced 4K, pixel-to-pixel scaled signals for use with videowall controllers, mixing and processing suites, or for transmission.

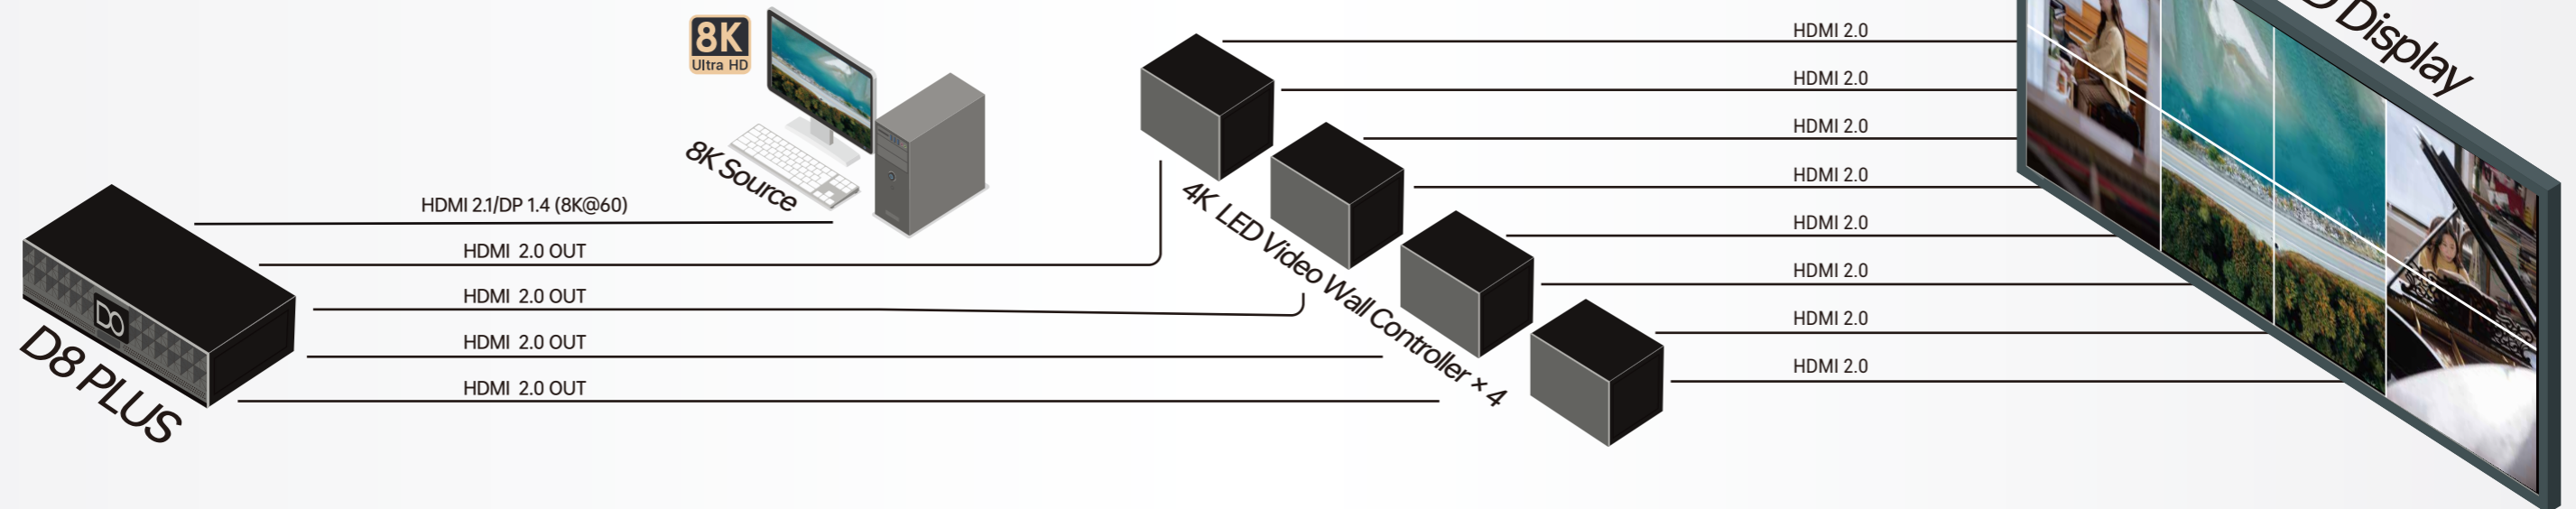

Custom Display Layouts

Take advantage of presets or customized arrangements, with D8 processing the 8K source, allowing the scaling to be offloaded from the 8K media compute platform for increased system performance.

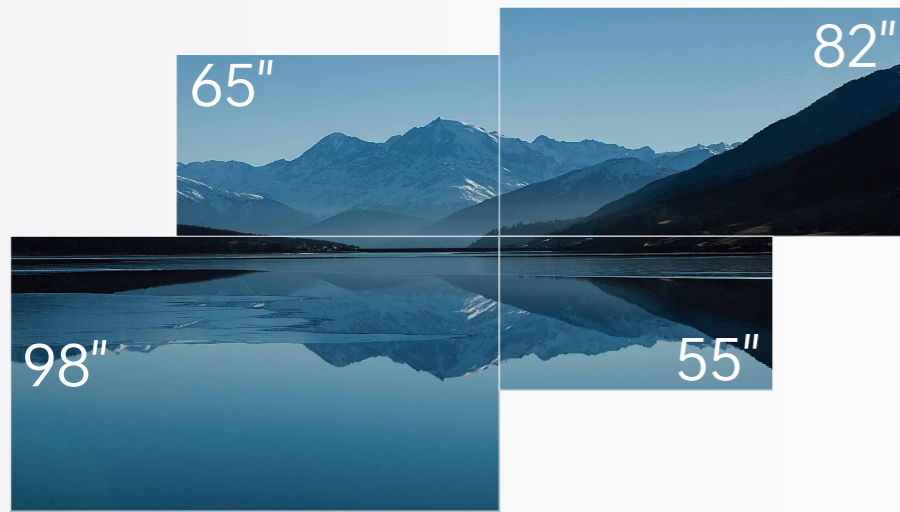

8K unequal splicing



8K vertical four-split splicing




8K equal split stitching




8K horizontal unequal splicing

8K Decoding & Display

Bring 8K video to 8K HDMI 2.0 displays and video walls.

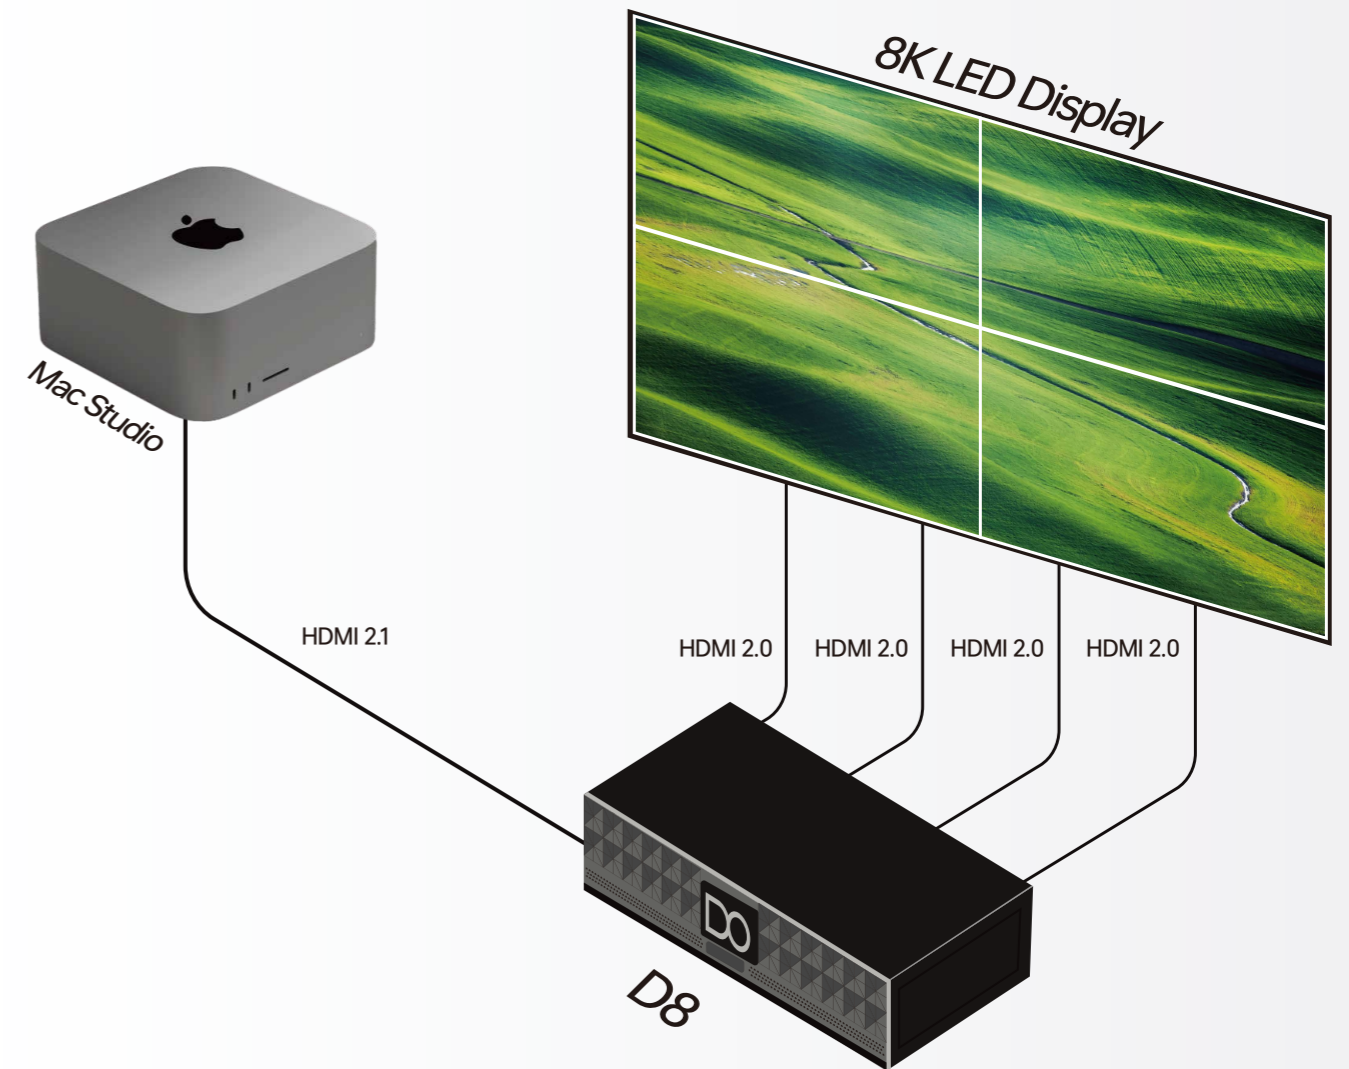



D8

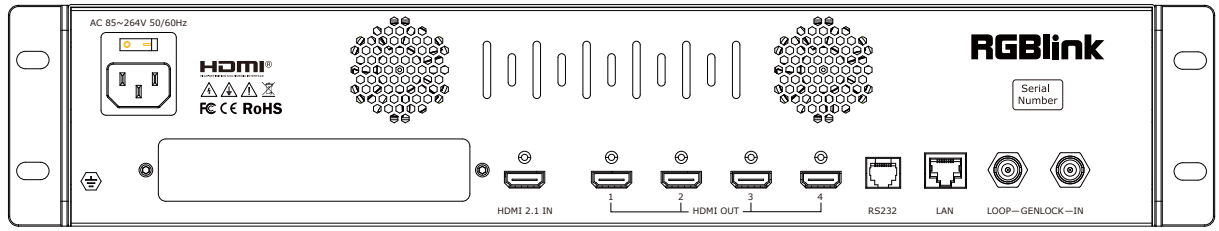

Specification

Model		D8		D8 PLUS		
Connectors	Input	HDMI 2.1	1×HDMI-A	HDMI 2.1	1×HDMI-A	
	Output	HDMI 2.0	4×HDMI-A	DP 1.4	1×DP	
	Communication	Genlock In (preliminary)	2×BNC (1×IN 1×LOOP)		Genlock (preliminary)	2×BNC (1×IN 1×LOOP)
		LAN	1×RJ45		LAN (preliminary)	1×RJ45
	Power	RS232	1×RJ11		RS232	1×RJ11
Performance	Input Resolutions	Automatic recognition				
		HDMI 2.1				
		SMPTE	1280x720@50/60 1920x1080@30/50/60 3840x2160@25/30 7680x4320@30/60			
		VESA	1024x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1440x900@60 1920x1200@60 2560x1440@60 2560x1600@60/120 3840x2160@30/60 4096x2160@50/59/60 7680x4320@30/60 custom resolution			
		DP 1.4				
		SMPTE	1280x720@50/60 1920x1080@30/50/60 3840x2160@25/30 7680x4320@30/60			
	Output Resolution	VESA	1024x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1440x900@60 1920x1200@60 2560x1440@60 2560x1600@60/120 3840x2160@30/60 4096x2160@50/59/60 7680x4320@30/60 custom resolution			
		Select standard resolution or custom resolution				
		HDMI 2.0				
		SMPTE	1280x720@50/60 1920x1080@30/50/60 3840x2160@30/60			
Supported Standard	VESA	1280x720@23.98/24/25/29.97/30/50/59.94/60 1920x1080@23.98/24/25/29.97/30/50/59.94/60 3840x2160@23.98/24/25/29.97/30/50/59.94/60 4096x2160@23.98/24/25/29.97/30/50/59.94/60 custom resolution				
	DP	1.4				
Power	Input Voltage	AC 100V-240V, 50/60Hz				
Working Environment	Temperature	0°C ~ 45°C				
	Humidity	15% ~ 85%				
Physical	Device Weight	7.2kg				
	Packaged Weight	8.5kg				
	Device Dimension	484mm×378mm×88.9mm				
	Packaged Dimension	630mm×585mm×250mm				

Dimension

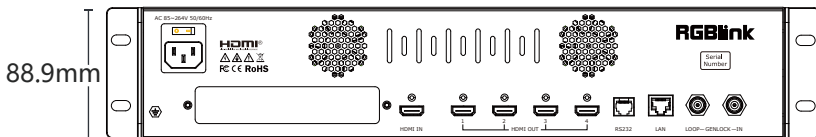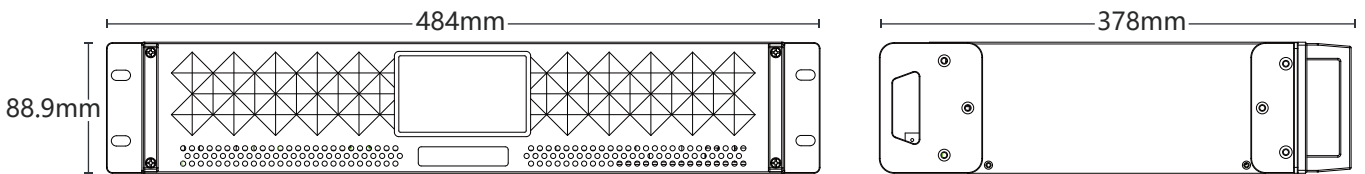

* 8K60 input resolutions and 4K60 output resolutions supported; downward compatible with other custom input/output resolutions

Order Codes

Product Code	Item
130-0008-01-0	D8
130-0008-03-0	D8 PLUS

HDMI® HDCP™

Proudly designed and manufactured in Xiamen Hi Technology Zone, China
 WEB: www.rgblink.com EMAIL: sales@rgblink.com PHONE: +86 592 5771197

RGBlink®



www.rgblink.com