

TAO 1tiny



Key Features

- 4K UVC camera to HDMI conversion
- Webcam signal transcoding
- Low Power consumption
- Power from standard USB-C PD PSU's
- Support for USB Bluetooth controls

Specification

Connectors	Input	USB 2.0	1xUSB-A
		Type-C	1xUSB-C
	Output	HDMI 2.0	1xHDMI-A
	Power		1xPD Type-C
Performance	Input Resolutions	Type C	
		SMPTE	720p@25/30/50/60 1080p@30/50/60 2160p@30
		VESA	1280x720@30/50/60 1280x768@60 1920x1080@25/30/50/60 3840x2160@30
	Output Resolutions	HDMI	
		SMPTE	720p@25/30/50/60 1080p@30/50/60 2160p@30/60
	VESA	1280x720@30/50/60 1280x768@60 1920x1080@25/30/50/60 3840x2160@30/60	
	Supported Standard	HDMI	2.0
		USB	3.0
	Decoding Formats	MJPEG YUV H.264	
	Compatibility	Camera with UVC1.1/UVC1.5 protocol	
Power	Input Voltage	9V/2A or 5V/2A(depends on adapter)	
	Max Power	18W	
Environment	Temperature	0°C~55°C	
	Humidity	20%~55%	
Physical	Weight	Net	0.08kg
		Packaged	0.136kg
	Dimension	Net	90.5mm × 55.5mm × 27.2mm
Packaged		104mm × 92mm × 37mm(1pcs)	565mm × 490mm × 345mm(125pcs)

*Power of Adapter is not less than:5V/2A/10W;Do not use the USB port of the computer for power supply

Application


How to work with USB camera with TAO 1tiny



How to work with mini series with TAO 1tiny



Dimension

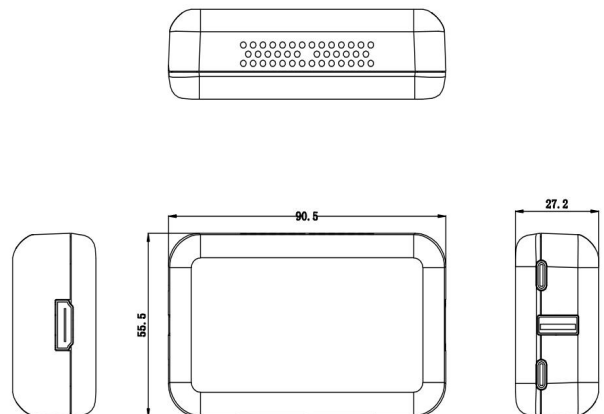

Order Codes

Product Code	Item
410-5513-02-3	TAO 1tiny

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgbink.com

