

TAO 1tiny



Key Features

- 4K UVC camera to HDMI conversion
- Webcam signal transcoding
- Low Power consumption
- Power from standard USB-C PD PSU's
- Support for USB Bluetooth controls

Specification

Connectors	Input	USB 2.0	1×USB-A
		Type-C	1×USB-C
	Output	HDMI 2.0	1×HDMI-A
	Power		1×PD Type-C
Performance	Input Resolutions	Type C	
		SMPTE	720p@25/30/50/60 1080p@30/50/60 2160p@30
		VESA	1280×720@30/50/60 1280×768@60 1920×1080@25/30/50/60 3840×2160@30
	Output Resolutions	HDMI	
		SMPTE	720p@25/30/50/60 1080p@30/50/60 2160p@30/60
		VESA	1280×720@30/50/60 1280×768@60 1920×1080@25/30/50/60 3840×2160@30/60
	Supported Standard	HDMI	2.0
		USB	3.0
Decoding Formats	MJPEG YUV H.264		
Compatibility	Camera with UVC1.1/UVC1.5 protocol		
Compatibility Tested	RGBlink	mini, mini-pro, mini-edge, mini-mx, vue PTZ 2K	
	Blackmagic Design	ATEM mini, ATEM mini-pro, ATEM mini-pro ISO	
	OBSBOT	tiny 2K, tiny 4K, meet 2K, meet 4K	
	Insta360	X3, link UHD 4K AI	
	Logitech	4K Pro, Brio 300, Brio 505, C920s HD Pro, StreamCam	
	DJI	Osmo Action 4, Pocket 3	
	Yealink	UVC86	
Power	Input Voltage	9V/2A or 5V/2A(depends on adapter)	
	Max Power	18W	
Environment	Temperature	0°C~55°C	
	Humidity	20%~55%	
Physical	Weight	Net	0.08kg
		Packaged	0.136kg
	Dimension	Net	90.5mm × 55.5mm × 27.2mm
Packaged		104mm × 92mm × 37mm(1pcs) 565mm × 490mm × 345mm(125pcs)	

*Power of Adapter is not less than:5V/2A/10W;Do not use the USB port of the computer for power supply

Application


How to work with USB camera with TAO 1tiny



How to work with mini series with TAO 1tiny



Dimension

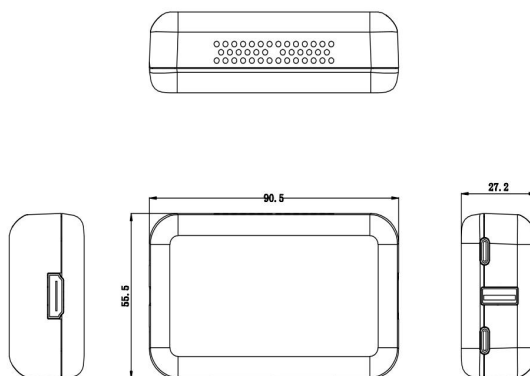

Order Codes

Product Code	Item
410-5513-02-3	TAO 1tiny

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

