




Key Features


- Picture-in-Picture (PIP)
- Audio and video synchronization
- Support multiple signal format inputs
- Seamless TAKE switching between inputs
- Customized output resolution
- On board test patterns
- EDID management on board
- Standard build in with 2 DVI outputs
- Two empty slots reserved for universal sender cards and RGBlink SubitoNX™ Quatro sender module to install
- Support for XPOSE 2.0 control
- open API for 3rd party integration

Application

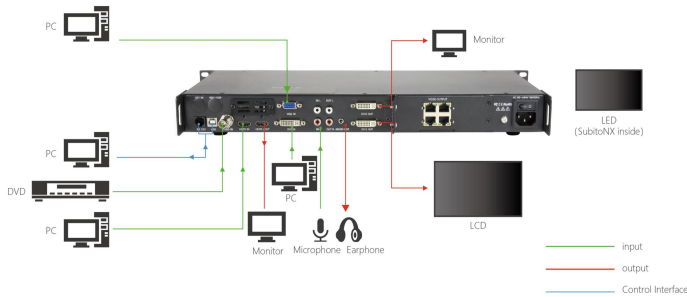

GX4pro with SubitoNX Quatro Module

Dimensions

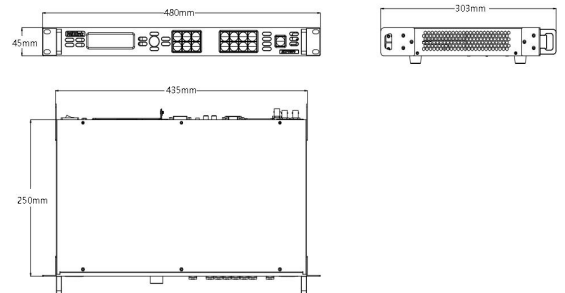

Order Codes

Product Code	Item
820-1004-05-0	GX4pro
190-0001-02-2	Single VGA Input Module
190-0001-04-1	Single DVI Input Module
190-0001-07-4	Single 3G-SDI Input/Loop Module
190-0001-09-2	Single CVBS Input/Backup Module

Product Code	Item
190-0004-03-0	Single HDMI Input/Loop Module
190-0004-05-0	Single HDBaseT Input Module
190-0004-08-0	Single SDI Input/Loop Module
880-0033-01-0	SubitoNX Quatro Sender Module

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]
www.rgblink.com



Specification

Connectors	Input	Standard with	HDMI In/Loop	2×HDMI-A
			DVI	1×DVI-I
			VGA	1×DB15
			CVBS	1×BNC
		1 specific slot up to 1 SDI input	Select from	SDI In/Loop
	1 slot up to 1 input	Select from	DVI	1×DVI-I (DVI, VGA, YPbPr, CVBS)
			HDMI	2×HDMI-A (1 In 1 Loop)
			3G-SDI	2×BNC (1 In 1 Loop)
			USB	2×USB-A (1 In 1 Backup)
			CVBS	2×BNC (1 In 1 Backup)
			HDBaseT	1×RJ45
	Audio		IN L/R	2×RCA
			OUT L/R	2×RCA
			Audio Out	1×3.5mm Stereo Jack
	Output		DVI	2×DVI-I
		2 slots up to 4 Gigabit ethernet ports	SubitoNX Quatro Module	4×RJ45
	Communication		Serial RS232 In	1×RJ11
			Serial USB In	1×USB-B
	Power		1×IEC	
Performance	Input Resolutions	DVI HDMI	SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60	
		VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60	
		VGA	VESA 800×600@60 1024×768@60 1280×1024@60 1366×768@60 1440×900@60 1600×1200@60 1920×1080@60	
		SDI	SMPTE 480i 576i 720p@25/30/50/60Hz 1080i@50/59.94/60Hz 1080p@23.98/24/25/29.97/30/50/59.94/60Hz	
	Output Resolutions	Select from below or configure customized	DVI SMPTE 720p@30/50/60 1080p@30/50/60	
		VESA	1024×768@60 1280×720@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1400×1050@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60 2048×1152@60 2560×816@60	
	SubitoNX™ Quatro	RJ45 Digital Output Port (each port)	Capacity	2310000 pixels
			Horizontal Range	3840 pixels
			Vertical Range	1920 pixels
	Supported Standard	SDI	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI	
		VGA	UXGA	
		HDMI	1.3	
Power	Input Voltage	AC 100V-240V, 50/60Hz		
	Max Power	25W		
Environment	Temperature	0°C ~ 55°C		
	Humidity	20%~90%		
Physical	Weight	Net	3.1kg	
		Packaged	5.25kg	
	Dimension	Net	480mm × 303mm × 45mm	
		Packaged	540mm × 360mm × 135mm	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

